bodor

BOOOT Series


Classic Model | Fully Protective Sheet Laser Cutting Machine






Cutting Parameter AutoMatch

Through visual comparison of sample parts and cutting parameter automatch to enhance cutting quality, and reduce labor costs.

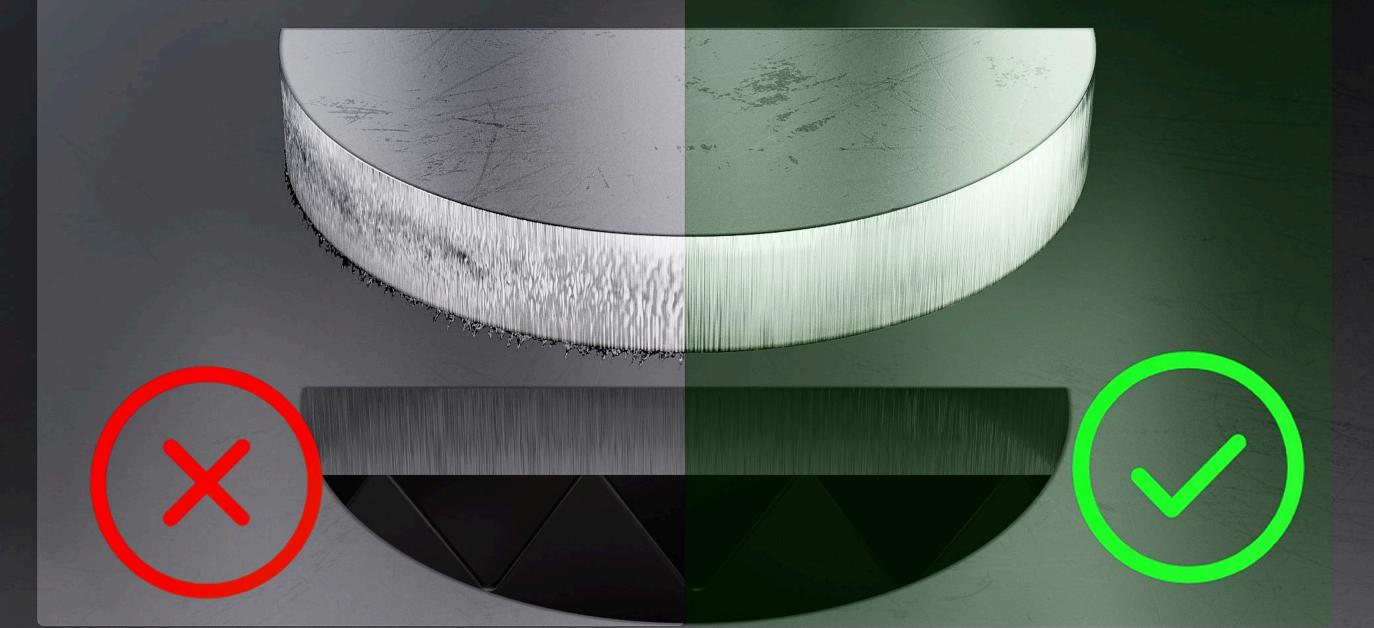

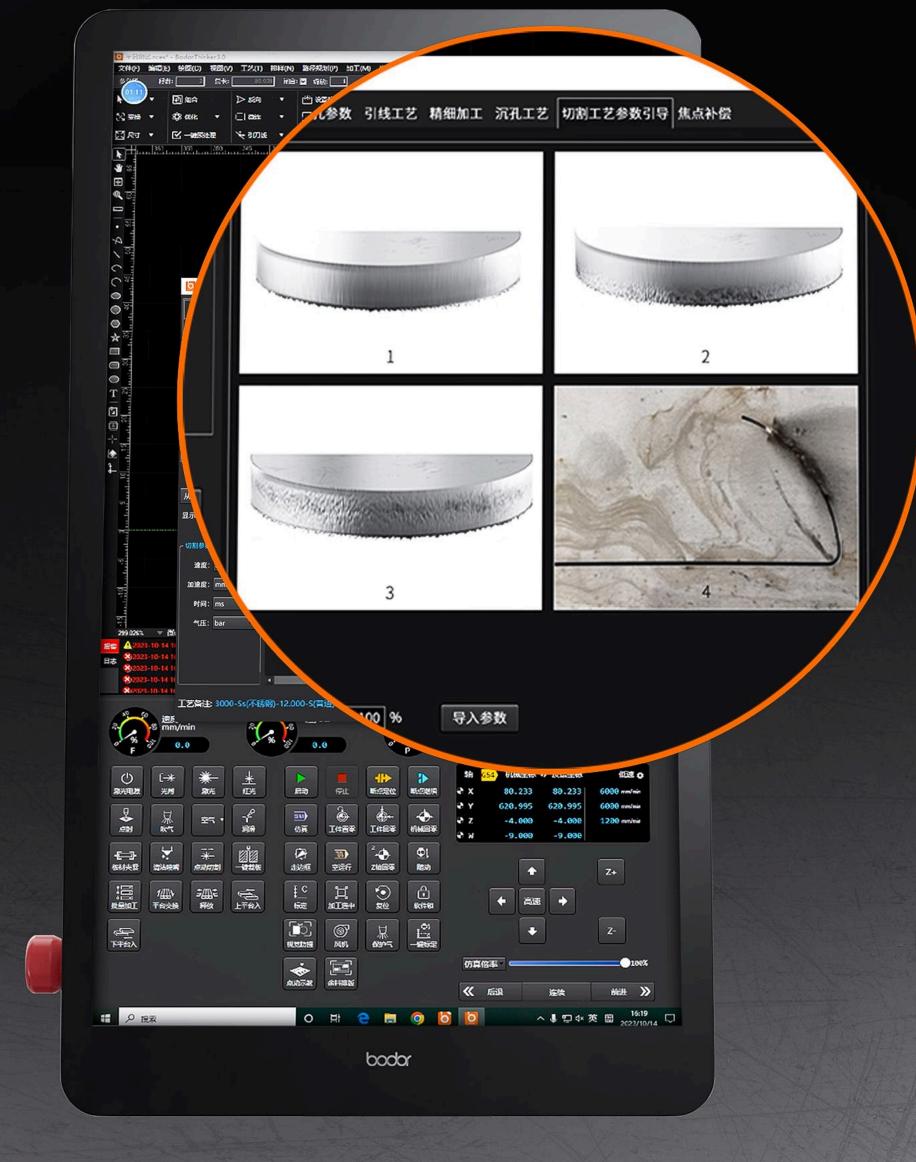

Comprehensive performance

improved by 30 %

relative to the last generation.

bodor

Maximum acceleration up to 5 G

It adopts high-performance bus servo motors to achieve the absolute leading dynamic performance (compared with similar products in the market).


Significantly improving processing efficiency to ensure that every second you invest is creating value.




Optional

Laser Scanning Cutting Fearless High-Reflective Sheets


Scanning Cutting Pioneer Ideal Cutter for High-Reflective Materials
When cutting high-reflective materials, the optical path changes constantly, reducing more than 90% of the reflected light source and ensuring the stable processing of highly reflective sheets.

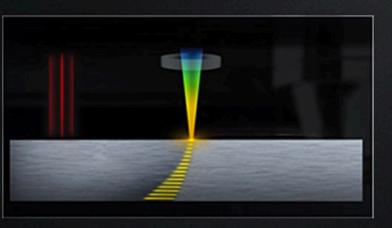

Conventional Laser Cutting

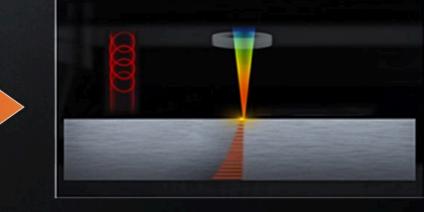

Laser Scanning Cutting

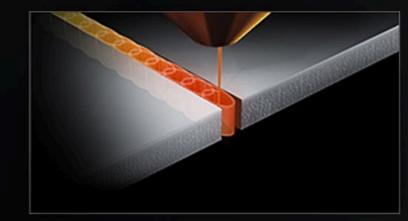

Laser Scanning Cutting Principle

Optional


Various Accessories for Efficient Assistance

Personalized options such as five-axis bevel cutting, and dust removal systems enhance production capabilities significantly.







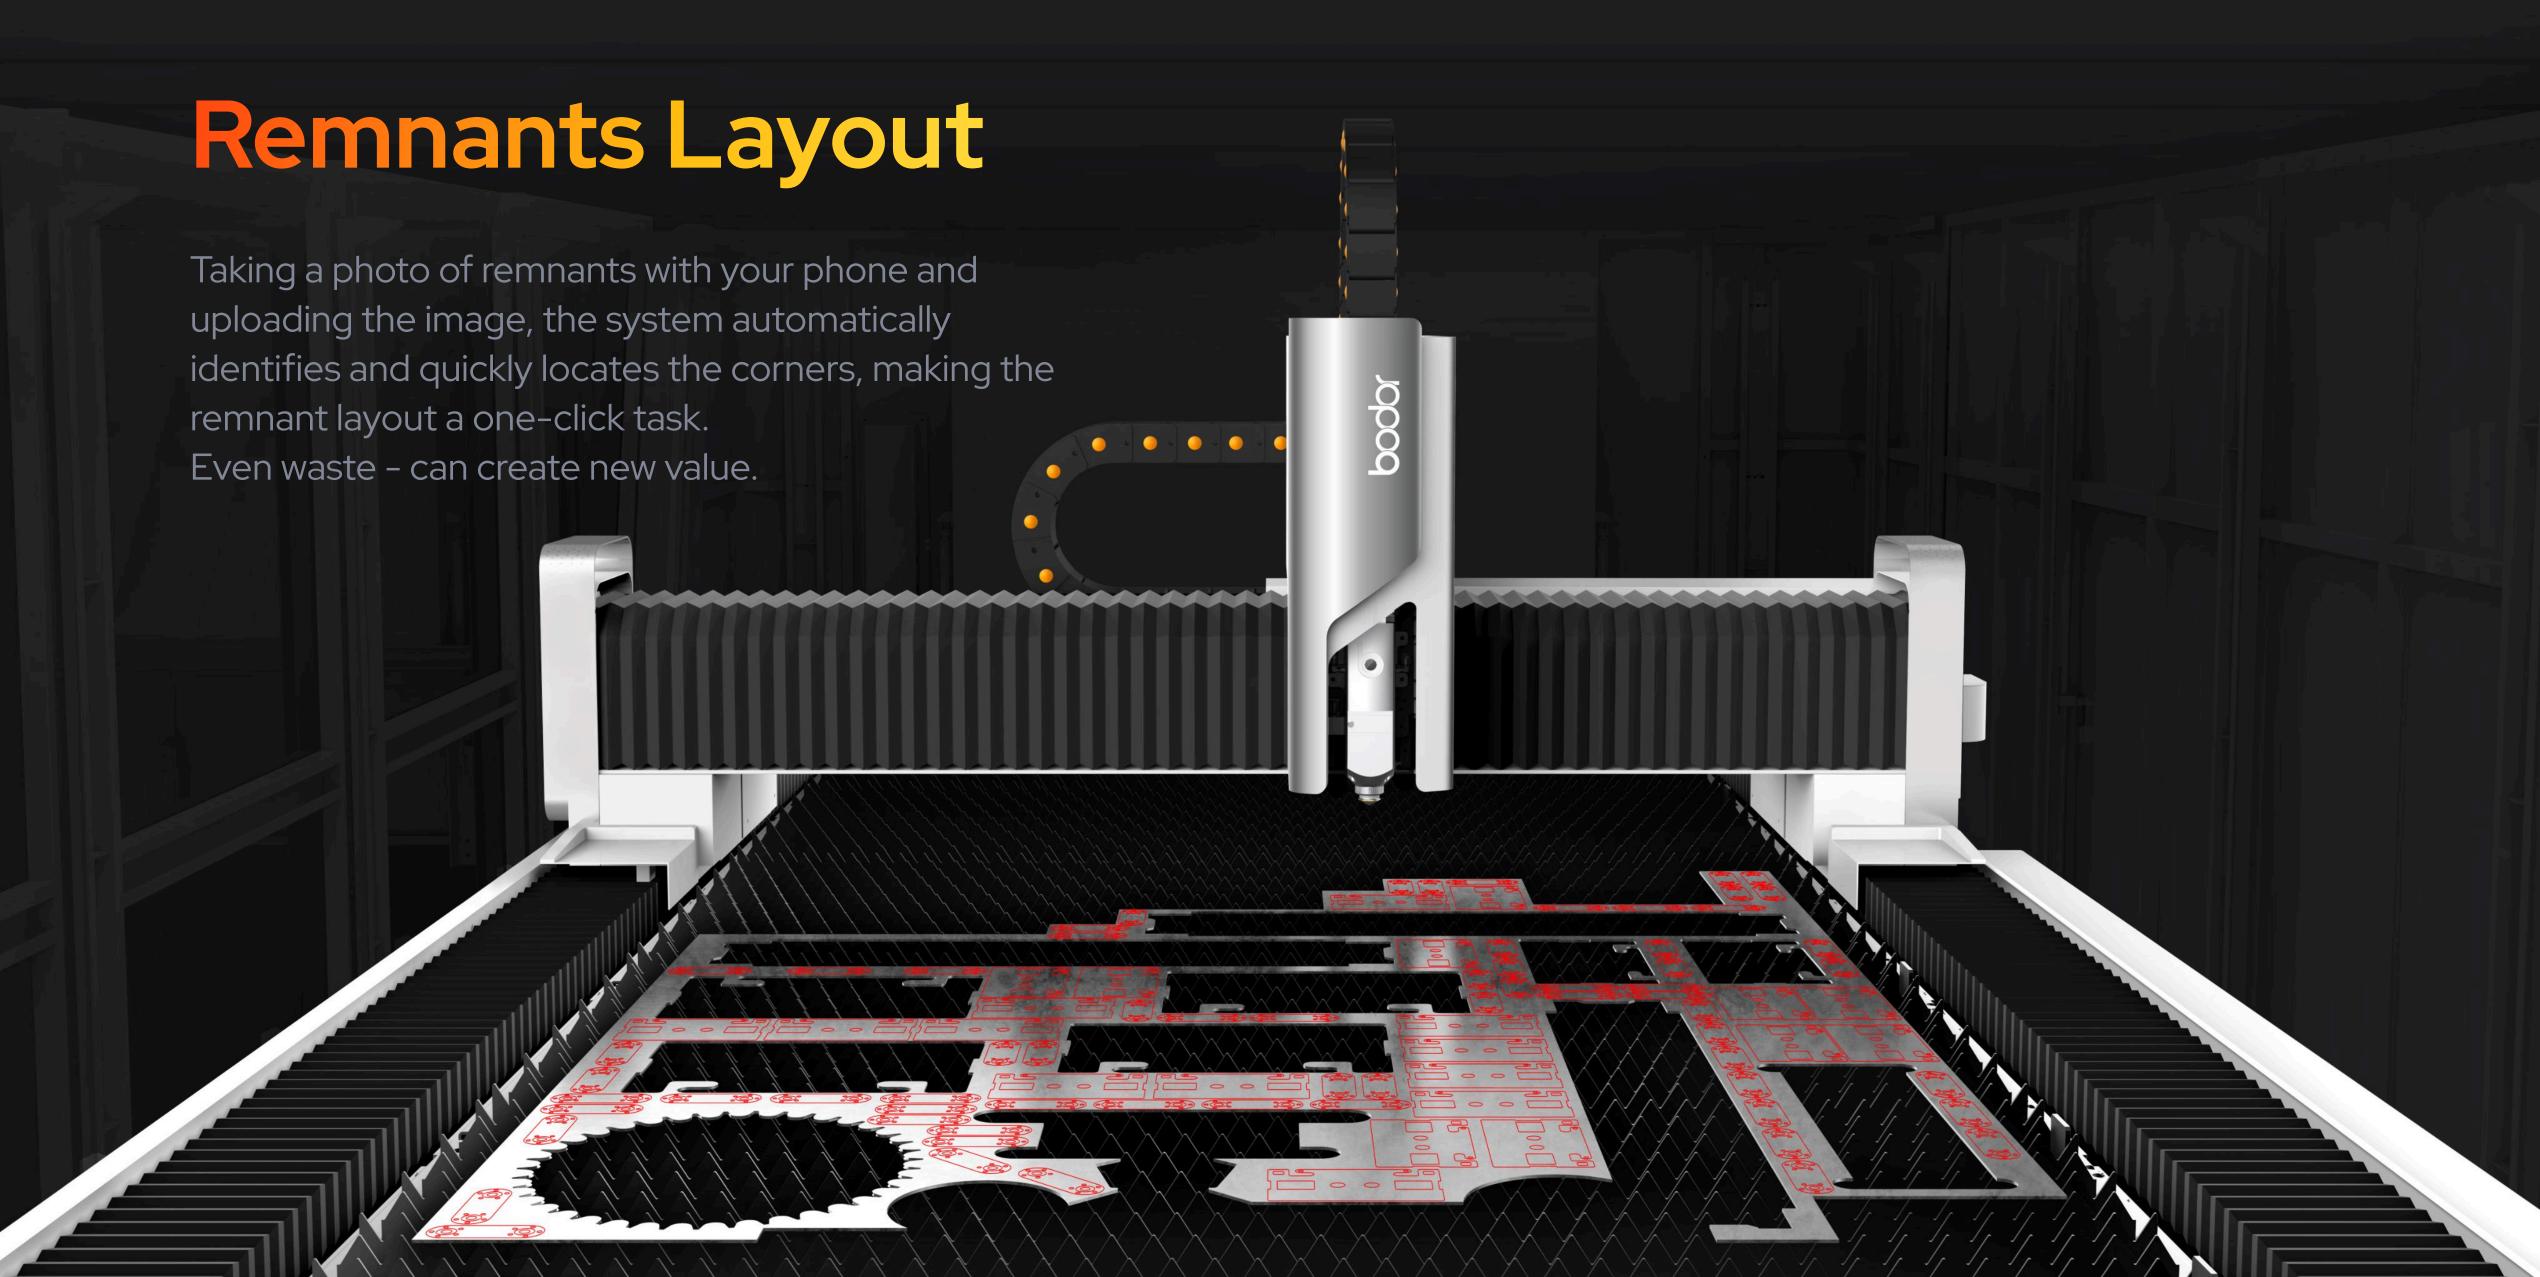





5-year Warranty for Bodor Self-developed Three Core Laser Components

With our perfect integration technology for the self-developed BodorThinker control system, BodorPower laser source, and BodorGenius laser head, we can extend the service warranty for these three core components to five years! The three core components are designed, produced, tested, and delivered in an integrated manner, working perfectly together to make the equipment run more stably and efficiently. At the same time, it greatly reduces the risk of component contamination and failure rate, extends the lifespan, and lowers maintenance costs by avoiding repeated assembly.



Control System

Laser Source

Laser Head





C Series Parameters

	C 3	<u>C4</u>	<u>C6</u>	C12
Working Area	3048mm×1524mm	4000mm×2000mm	6100mm×2500mm	12200mm×2500mm
Max. Linkage Speed	120 m/min	110 m/min	110 m/min	110 m/min
Max. Acceleration	1.5G	1.5G	1.5G	1.5G
Cutting Parameter AutoMatch	●12kW and above	●12kW and above	●12kW and above	●12kW and above
One-Click Processing				
Remnant Typesetting				
Active Anti-Collision Function				
Intelligent Anti-Shake				•



The Heritage of Aesthetics and Performance

Unique Symoblization of Bodor Family

